



Installation Example
in asphalted areas Class D 400 - E 600

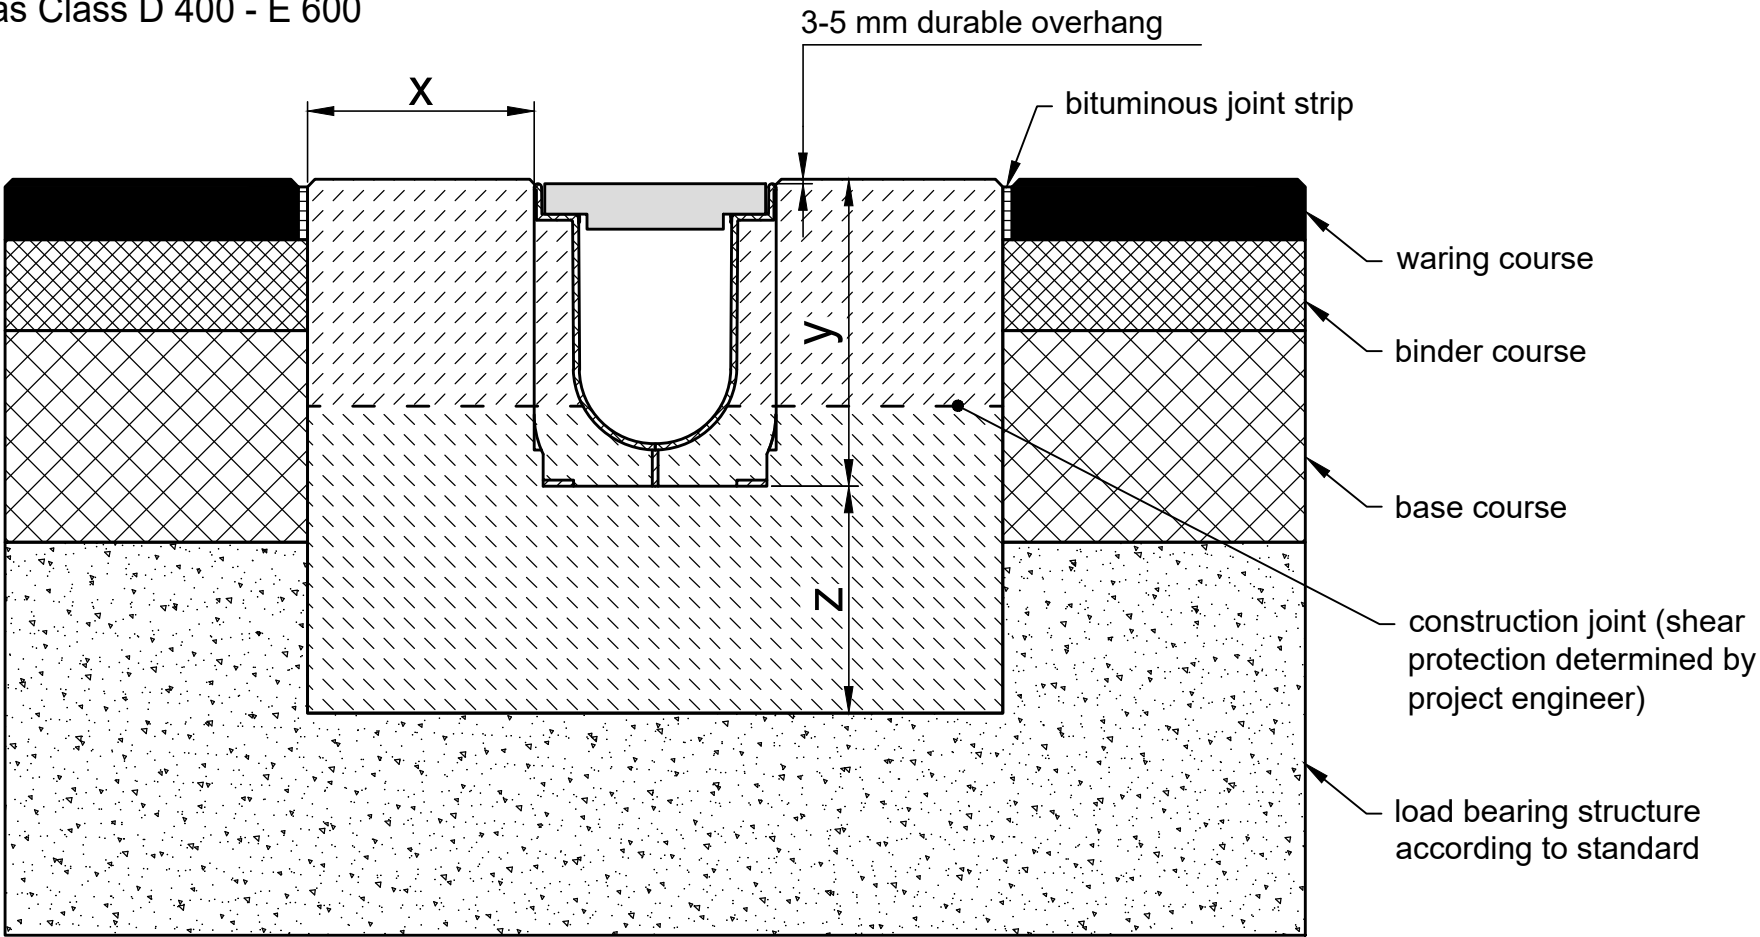

* y = Channel height plus camber

| | | | | | | | | | |
|--|--|------|-------|--|----------------|--|---------|--------------------------------|--|
| Category according to EN 1433 / DIN 19580 | | A 15 | B 125 | C 250 | D 400** | E 600** | F 900** | Applying to following systems: | |
| Foundation: width x / height y / thickness z (in cm) | | | | | 15 / * / 15 | 15 / * / 20 | | RECYFIX NC 100, 150, 200, 300 | |
| EN 206-1 / DIN 1045-2 | quality of concrete stretcher | | | | C30/37 XF4,XM1 | C30/37 XF4,XM1 | | | |
| | without danger of frost on the lateral support | | | | C25/30 X0 | C25/30 X0 | | | |
| | with danger of frost on the lateral support | | | | C25/30 XF3 | C25/30 XF3 | | | |
| The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at www.hauraton.com In building construction is a sealing layer below the channels necessary. | | | | Date: 17.04.2023 | | Our general installation instructions apply. | | Format DIN A4 |  Werkstr. 13 76437 Rastatt Germany Tel. +49 (0) 72 22 9 58-0 info@hauraton.com |
| The installation example represents a proven recommendation from HAURATON. The final responsibility for the execution lies with the planner in charge. Specific conditions of the project must be taken into account. | | | | | | | | scale 1:5 | |
| * Installation situations of drainage systems with high dynamic loads (e.g. airports, expressways and maneuvering areas of buses, trucks and forklifts, etc.) are not sufficiently considered in DIN EN 1433. Please contact us for such applications to work out project-specific solutions. | | | | 0000049864_ENGLISH.dwg | | 12 | EBBw | | |
| | | | | RF-NC-100 Typ 010 Rinnenunterteil Einbaubeispiel Klasse D 400 in Asphalt | | | | | |