



Installation Example  
Pavement Class D 400

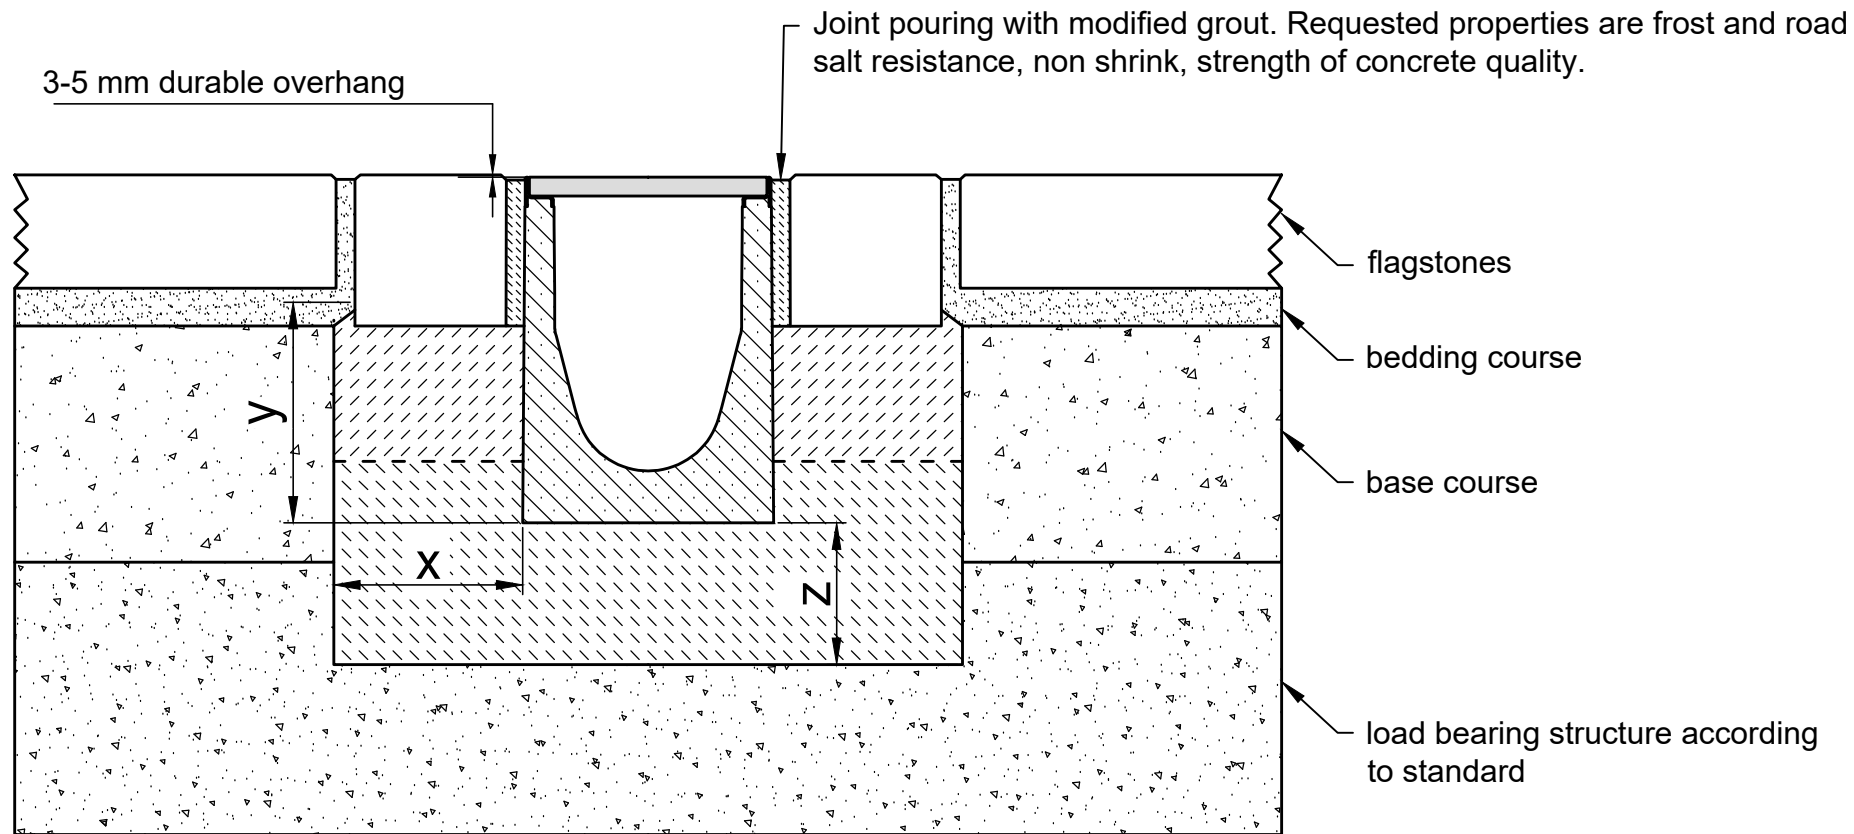

\* y = Channel height -14 cm

Category according to EN 1433 / DIN 19580		A 15	B 125	C 250	D 400**	E 600**	F 900**	Applying to following systems:	
Foundation: width x / height y / thickness z (in cm)					20 / * / 15			<b>FASERFIX KS 100, 150, 200, 300</b> <b>SERVICE CHANNEL FASERFIX KS 100, 150, 200, 300</b>	
EN 206-1 / DIN 1045-2  The named concrete quality is a minimum quality	quality of concrete stretcher								
	without danger of frost on the lateral support				C25/30 X0				
	with danger of frost on the lateral support				C25/30 XF3				
The installation examples / advise constantly are adapted to the technical conditions. With new editions older expenditures lose their validity. Before planning or installation please verify the current version at <a href="http://www.hauraton.com">www.hauraton.com</a> In building construction is a sealing layer below the channels necessary.				Date: 15.02.2024		Our general installation instructions apply.		Format DIN	A4
The installation example represents a proven recommendation from HAURATON. The final responsibility for the execution lies with the planner in charge. Specific conditions of the project must be taken into account.								scale	1:8
The installation situations of drainage systems with high dynamic loads (e.g. airports, expressways and maneuvering areas of buses, trucks and forklifts, etc.) are not sufficiently considered in DIN EN 1433. Please contact us for such applications to work out project-specific solutions.				0000023698_ENGLISH.dwg		23		EBBw	
				FF-KS-200 Typ 010 Rinnenunterteil Einbaubeispiel Klasse D 400 in Pflaster					
				<div><div> <b>hauraton</b></div><div>Werkstr. 13 76437 Rastatt Germany</div><div>Tel. +49 (0) 72 22 9 58-0 info@hauraton.com</div></div>					