

RECYFIX® STANDARD

Drainage channel for domestic applications around the house and garden.





RECYFIX® STANDARD

Drainage channel for domestic applications around the house and garden.

1 Requirements

Drainage channels in private areas have to

- withstand permanently the daily stress of cars and pedestrians.
- be easy to transport and install
- withstand weather influences (frost, heat, humidity).
- be optically attractive.
- be in accordance with DIN EN 1433.

2 Application areas

- predominantly private areas
- driveways
- courtyards
- terraces
- gardens
- parks

3 Solutions

Therefore RECYFIX STANDARD Channels are suitable for the drainage of private areas

- high stability and functionality
- low weight
- preformed vertical and horizontal outlets
- nominal sizes from 100 to 300 mm with different heights
- stable gratings in loading classes A 15 up to C 250 according to DIN EN 1433



Access to private house



Water fun park



Veszprem Arena in Hungary



Spa Fürthermare in Fürth, Germany



Private house



Street in Hungary

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel


FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

The benefits of **RECYFIX®PLUS** and **RECYFIX®STANDARD** Channels



Numerous grating options

- in the materials: ductile iron, galvanised or stainless steel
- narrow slot width for pedestrian areas available

= flexibility

Frame systems

RECYFIX®PLUS


- galvanised or stainless steel frames

RECYFIX®STANDARD

- PE-PP frames

= security






Pre-assembled ready for installation

- channel and grating = one part
- no spare parts
- easy handling on stock and construction site
- cost efficient transport

= **better gross margin**



High resistance

- high resistance against frost, de-icing salt and UV rays
- withstands high temperature differences

= **durability**



Low weight ensures easy handling on site

- much lighter compared to channels made of polymere concrete
- easy transport and installation

= **cost savings**

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

RECYFIX®PLUS and RECYFIX®STANDARD

RECYFIX®PLUS channels provide for a state-of-the-art drainage at the Vodafone campus in Düsseldorf

Durable and free of corrosion:

Façade and terrace drainage using RECYFIX PLUS.

The Vodafone campus - a state-of-the-art office complex with workplaces for more than 5000 employees. More than 300 million Euros have been invested in bringing different sites together at the new head office. The building was designed and implemented in accordance with the criteria of the seal of quality for sustainable construction LEED Gold (Leadership in Energy and Environmental Design); one of the reasons why environmentally friendly products made from recycled PE-PP were chosen for the drainage channels.

Reasons for using about 700 metres of RECYFIX®PLUS:

- Low construction costs
 - Ease of installation and processing Polygonal laying rather than radial tailor-made channel
- Ecological material
 - Recycled PE-PP complies with requirements for LEED Gold certification
 - Extremely detailed specifications with regard to material origin, material composition and manufacturing procedure
- Elegant appearance
 - Continuous metal edge on surface
 - Mesh gratings with no interfering little plates containing manufacturer details and load specifications



**Vodafone-Campus
in Düsseldorf, Germany**



RECYFIX® PRO							
RECYFIX® PLUS							
RECYFIX® STANDARD							
DACHFIX®							
Slotted Channel							
FASERFIX® STANDARD							
RECYFIX®POINT FASERFIX®POINT							
RECYFIX® GREEN							
LINEFIX®							

RECYFIX®PLUS and RECYFIX®STANDARD

Drainage channels with sophisticated look for public and commercial areas.

RECYFIX PLUS and RECYFIX STANDARD Channels meet the requirements of DIN EN 1433 and are suitable for the following load categories:



Category A 15, Load class 15 KN

Trafficked areas, which are exclusively used by pedestrians and cyclists



Category B 125, Load class 125 kN


Sidewalks, pedestrian areas and comparable areas, car parks or car parking decks




Category C 250, Load class 250 KN

Sidewalk channel areas and untraveled side panels or similar


In case of doubts, the higher category should be used.

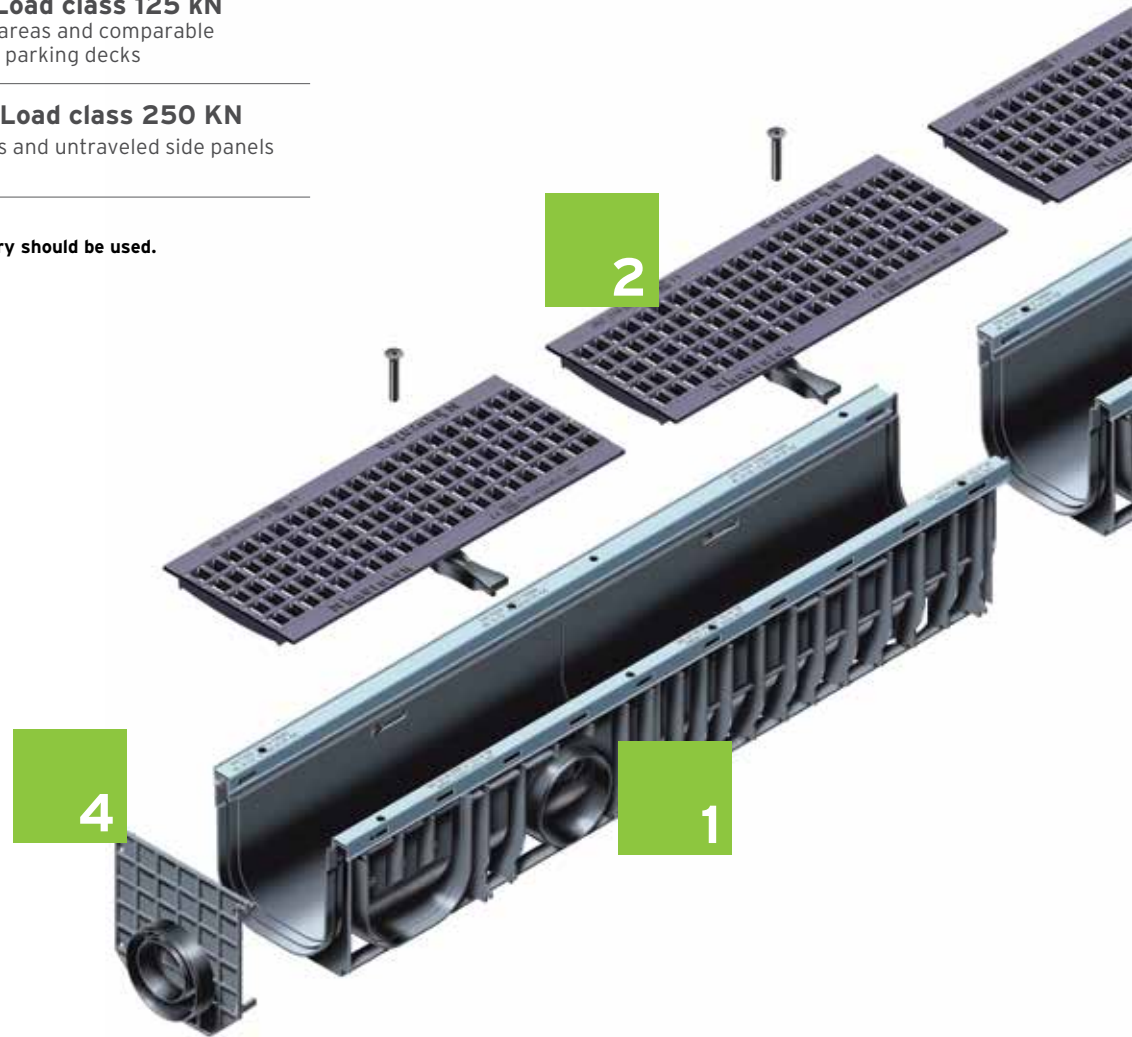

Grating options RECYFIX PLUS Channels

	GUGI-Ductile iron Mesh gratings*	Ductile iron gratings*	Slotted gratings*	Mesh gratings*	Perforated gratings*
					
Load categories acc. DIN EN 1433					
Car traffic			100	100	
A 15			150, 200		100
B 125				100, 150, 200	
C 250	100, 150, 200, 300	100, 150, 200			

*sizes are nominal widths

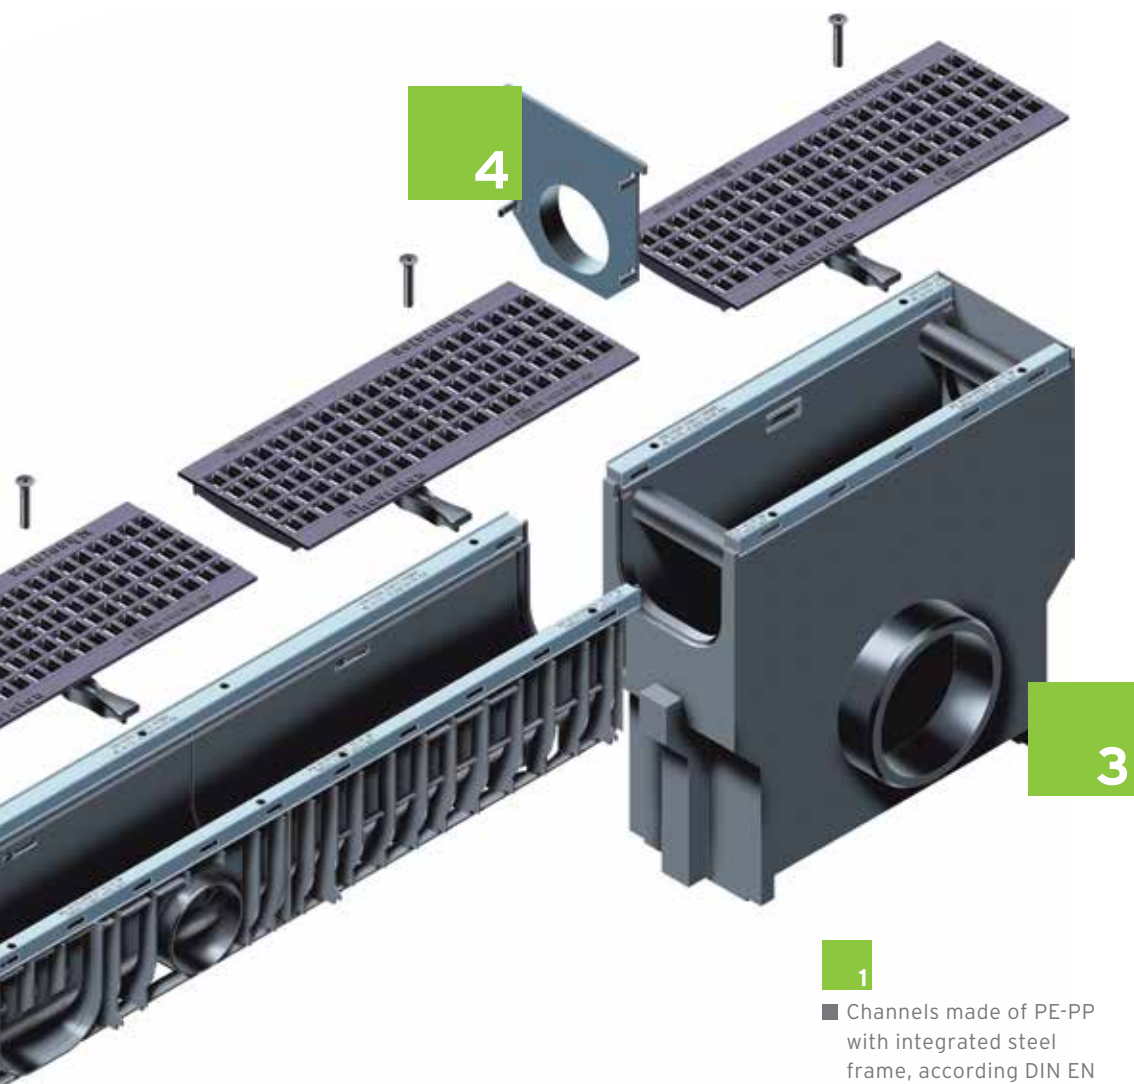

1

■ Channels made of PE-PP with integrated steel frame, according DIN EN 1433, with sleeve and feather connection for exact installation, combined article with various grating possibilities

2

■ Different grating options, i.e. GUGI-Ductile iron mesh gratings

3

■ Trash box with pipe connection possibility

4

■ End caps with or without outlet

Grating options RECYFIX STANDARD Channels

	GUGI-Ductile iron Mesh gratings*	Ductile iron gratings*	Slotted gratings*	Mesh gratings*	Perforated gratings*
Load categories acc. DIN EN 1433					
Car traffic			100	100	
A 15			150, 200		100
B 125				100, 150, 200	
C 250	100, 150, 200, 300	100, 150, 200			

*sizes are nominal widths

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

Your way to the tender text on **hauraton.com**

1 a) Product known

- Go to the product page.



b) Product unknown

- Go to the specification tool.



- choose application
- choose field of application, loading capacity and nominal size
- select from the proposed systems / items

2 Choose required format and add it to your documents



3 Download tender text

- Go to „My documents“.



RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT




RECYFIX®
GREEN

LINEFIX®

RECYFIX®STANDARD 100

RECYFIX®STANDARD 100, combi article, class A 15

Type 01 with perforated grating "Elegance", stainless steel, locked

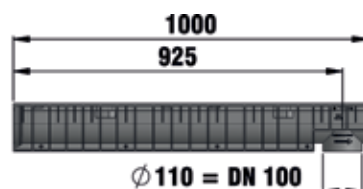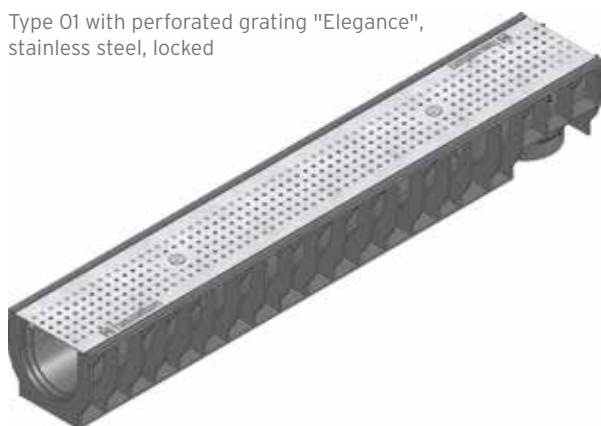

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No. galvanised	Item No. stainless steel
Type 01 with perforated grating "Elegance", stainless steel, locked	1000	158	135	92	161	4,5	41240	41240
Type 010 with perforated grating "Elegance", stainless steel, locked	1000	150	185	142	161	5,4	41242	41242
Type 0105 with perforated grating "Elegance", stainless steel, locked	500	158	135	92	161	2,3	41247	41247
Type 01005 with perforated grating "Elegance", stainless steel, locked	500	150	185	142	161	2,7	41248	41248
Type 60 with perforated grating "Elegance", stainless steel, locked*	1000	150	60	35	161	3,2	41244	41244
Type 80 with perforated grating "Elegance", stainless steel, locked*	1000	150	80	55	161	3,1	41246	41246

* For frequently used areas we recommend FASERFIX SUPER KS Channels shallow (see CIVILS).



The quality of stainless steel material corresponds to CNS 1.4301.

Combi articles with perforated gratings galvanised cannot be delivered.

RECYFIX®STANDARD 100

RECYFIX®STANDARD 100, combi article, car traffic

Type 010 with slotted grating SW 9, locked

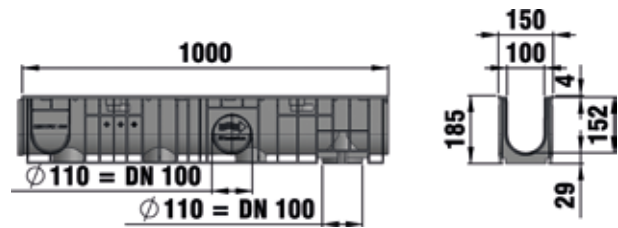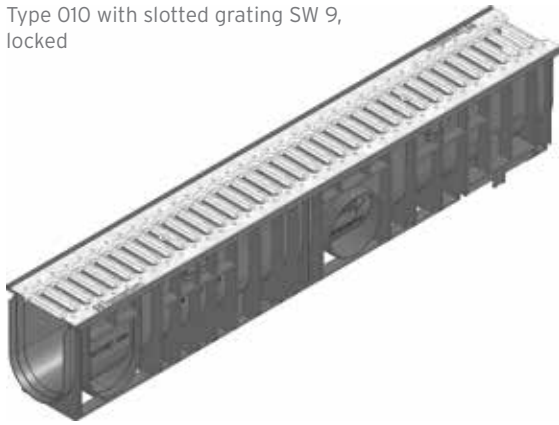

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No. galvanised	Item No. stainless steel
Type 01 with slotted grating SW 9, locked	1000	158	135	92	280	4,4	40231	41200
Type 010 with slotted grating SW 9, locked	1000	150	185	142	280	5,3	40296	41202
Type 0105 with slotted grating SW 9, locked	500	158	135	92	280	2,2	40261	41207
Type 01005 with slotted grating SW 9, locked	500	150	185	142	280	2,6	40266	41208
Type 60 with slotted grating SW 9, locked*	1000	150	60	35	280	3,0	40236	41204
Type 80 with slotted grating SW 9, locked*	1000	150	80	55	280	3,1	40246	41206
Type 01 with mesh grating MW 30/10, locked	1000	158	135	92	650	5,2	40232	-
Type 010 with mesh grating MW 30/10, locked	1000	150	185	142	650	6,6	40297	-
Type 0105 with mesh grating MW 30/10, locked	500	158	135	92	650	2,6	40262	-
Type 01005 with mesh grating MW 30/10, locked	500	150	185	142	650	3,2	40267	-
Type 60 with mesh grating MW 30/10, locked*	1000	150	60	35	650	3,7	40237	-
Type 80 with mesh grating MW 30/10, locked*	1000	150	80	55	650	4,3	40247	-

* For frequently used areas we recommend FASERFIX SUPER KS Channels shallow (see CIVILS).
The quality of stainless steel material corresponds to CNS 1.4301.

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT




RECYFIX®
GREEN

LINEFIX®

RECYFIX® STANDARD 100

RECYFIX® STANDARD 100, combi article, class B 125

Type 010 with mesh grating MW 30/10, galvanised, locked

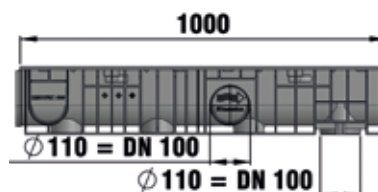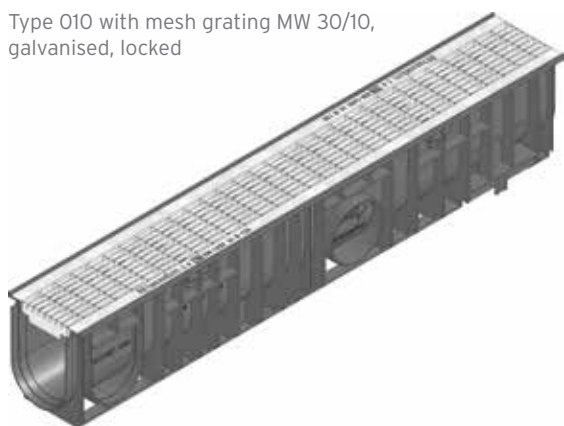



	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No. galvanised	Item No. stainless steel
Type 01 with mesh grating MW 30/10, galvanised, locked	1000	158	135	92	650	5,2	41220	41210
Type 010 with mesh grating MW 30/10, galvanised, locked	1000	150	185	142	650	6,6	41222	41212
Type 0105 with mesh grating MW 30/10, galvanised, locked	500	158	135	92	650	3,4	41227	41217
Type 01005 with mesh grating MW 30/10, galvanised, locked	500	150	185	142	650	3,8	41228	41218
Type 60 with mesh grating MW 30/10, galvanised, locked*	1000	150	60	35	650	5,0	41224	41214
Type 80 with mesh grating MW 30/10, galvanised, locked*	1000	150	80	55	650	5,1	41226	41216

* For frequently used areas we recommend FASERFIX SUPER KS Channels shallow (see CIVILS).

RECYFIX® STANDARD 100

RECYFIX® STANDARD 100, combi article, class C 250

Type 80 with GUGI-Ductile iron mesh grating MW 15/25, black, locked*

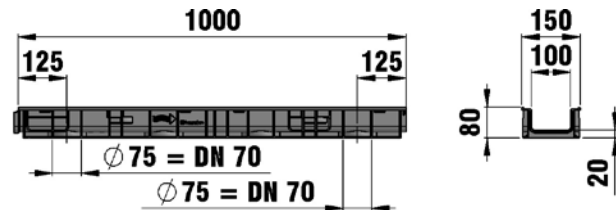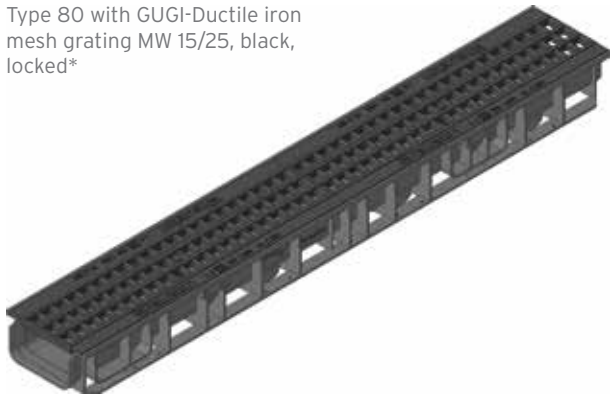

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 01 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	1000	158	135	92	444	7,7	40234
Type 010 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	1000	150	185	142	444	8,6	40299
Type 0105 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	500	158	135	92	444	3,9	40264
Type 01005 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	500	150	185	142	444	4,3	40269
Type 60 with GUGI-Ductile iron mesh grating MW 15/25, black, locked*	1000	150	60	35	444	5,4	40239
Type 80 with GUGI-Ductile iron mesh grating MW 15/25, black, locked*	1000	150	80	55	444	5,5	40253
Type 01 with ductile iron grating SW 14, black, locked	1000	158	135	92	450	8,2	40233
Type 010 with ductile iron grating SW 14, black, locked	1000	150	185	142	450	9,1	40298
Type 0105 with ductile iron grating SW 14, black, locked	500	158	135	92	450	4,1	40263
Type 01005 with ductile iron grating SW 14, black, locked	500	150	185	142	450	4,5	40268
Type 60 with ductile iron grating SW 14, black, locked*	1000	150	60	35	450	5,8	40238
Type 80 with ductile iron grating SW 14, black, locked*	1000	150	80	55	450	5,9	40248
Type 01 with ductile iron grating, SW 6 mm, locked	1000	158	135	92	290	9,2	41230
Type 010 with ductile iron grating, SW 6 mm, locked	1000	150	185	142	290	10,1	41232
Type 0105 with ductile iron grating, black, SW 6 mm, locked	500	158	135	92	290	4,6	41237
Type 01005 with ductile iron grating, black, SW 6 mm, locked	500	150	185	142	290	5,0	41238
Type 60 with ductile iron grating, black, SW 6 mm, locked	1000	150	60	35	290	7,6	41234
Type 80 with ductile iron grating, black, SW 6 mm, locked	1000	150	80	55	290	7,7	41236

* For frequently used areas we recommend FASERFIX SUPER KS Channels shallow (see CIVILS).

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

RECYFIX®STANDARD 100


RECYFIX®STANDARD 100, Accessories



Trash box with plastic bucket, slotted grating, SW 9, trafficable, locked



Trash box with plastic bucket and GUGI-Ductile iron mesh grating MW 20/30, black, class C 250, locked

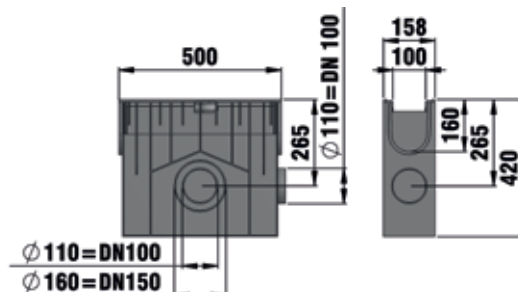

Foul air trap, vertical, DN 100



End cap combined made of PE-PP with outlet DN 70, type O1



End cap closed for type O10



End cap combined made of PE-PP with outlet DN 70, type O10

	Length mm	Width mm	Height mm	Weight kg	Item No. galvanised	Item No. stainless steel
Trash box with plastic bucket, with perforated grating, stainless steel, car-traffic, locked	500	158	420	4,6	41249	41249
Trash box with plastic bucket, slotted grating, SW 9, trafficable, locked	500	158	420	4,3	40256	41209
Trash box with plastic bucket, mesh grating MW 30/10, trafficable, locked	500	158	420	4,9	40257	-
Trash box with plastic bucket, mesh grating MW 30/10, galvanised, class B 125, locked	500	158	420	5,5	41229	41219
Trash box with plastic bucket and GUGI-Ductile iron mesh grating MW 20/30, black, class C 250, locked	500	158	420	6,0	40259	-
Trash box with plastic bucket, ductile iron grating SW 14, black, class C 250, locked	500	158	420	6,2	40258	-
Trash box with plastic bucket and ductile iron grating, SW 6 mm, black, cl. C 250 locked	500	158	420	6,9	41239	-
Foul air trap DN 100, inside	-	-	-	0,4	40288	-
Foul air trap, vertical, DN 100	-	-	-	0,6	40295	-
Foul air trap set, vertical DN 100 for RECYFIX 100	-	-	-	0,4	40294	-
Foul air trap, horizontal, with rubber sealing, black	-	-	-	0,1	966	-
Mud bucket vertical DN 100, black	-	-	-	0,1	40293	-
End cap closed, made of PE-PP, for type 60	-	147	60	0,1	40284	-
End cap closed, made of PE-PP, for Type 80	-	147	65	0,1	40291	-
End cap combined made of PE-PP with outlet DN 70, type O1	-	160	135	0,1	40281	-
End cap closed for type O10	-	147	185	0,1	40282	-
End cap combined made of PE-PP with outlet DN 70, type O10	-	149	185	0,1	40283	-
Sealing material Sikaflex TS Fast, 600 ml, tubular bag, black	-	-	-	0,6	6890	-
Tubular pistol for Sikaflex TS Fast	-	-	-	1,3	6891	-
Holesaw, Ø 102 mm, with tool holder for a driller	-	-	-	0,6	980	-

The quality of stainless steel material corresponds to CNS 1.4301.



RECYFIX®STANDARD 100

LINEFIX®	RECYFIX® GREEN	RECYFIX®POINT FASERFIX®POINT	FASERFIX® STANDARD	Slotted Channel	DACHFIX®	RECYFIX® STANDARD	RECYFIX® PLUS	RECYFIX® PRO
----------	-------------------	---------------------------------	-----------------------	-----------------	----------	----------------------	------------------	-----------------

RECYFIX®STANDARD 150

RECYFIX®STANDARD 150, combi article, class A 15


Type 01 with slotted grating,
galvanised, locked

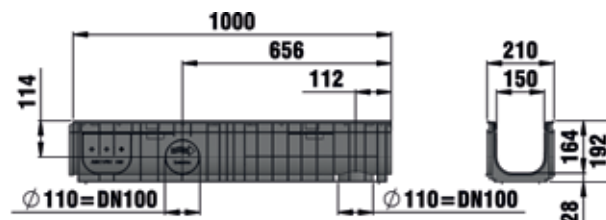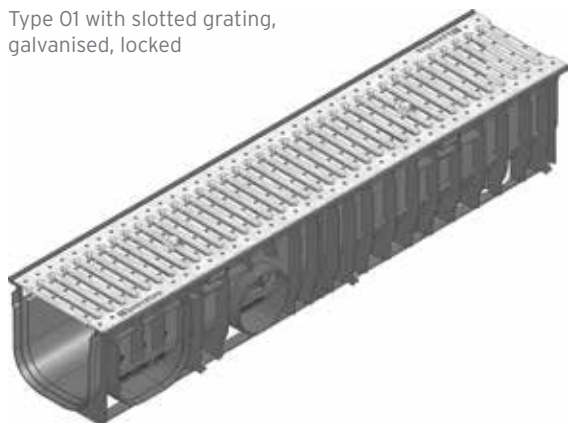

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 01 with slotted grating, galvanised, locked	1000	210	192	225	390	5,2	40164
Type 0105 with slotted grating, galvanised	500	210	192	225	390	2,7	40147
Type 100 with slotted grating, galvanised, locked	1000	210	100	116	390	4,6	40165

RECYFIX®STANDARD 150, combi article, class B 125

Type 01 with mesh grating MW 30/30,
galvanised, locked


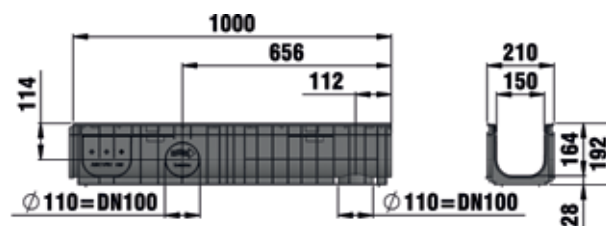


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 01 with mesh grating MW 30/30, galvanised, locked	1000	210	192	225	1081	7,7	40171
Type 0105 with mesh grating MW 30/30, galvanised, locked	500	210	192	225	1081	3,9	40146
Type 100 with mesh grating MW 30/30, galvanised, locked	1000	210	100	116	1081	6,6	40135
Type 01 with mesh grating MW 30/10, galvanised, locked	1000	210	192	225	1098	8,7	40177
Type 0105 with mesh grating MW 30/10, galvanised, locked	500	210	192	225	1098	4,5	40148
Type 100 with mesh grating MW 30/10, galvanised, locked	1000	210	100	116	1098	7,8	40136

RECYFIX®STANDARD 150

RECYFIX®STANDARD 150, combi article, class C 250

Type 01 with GUGI-Ductile iron mesh
grating MW 15/25, black, locked

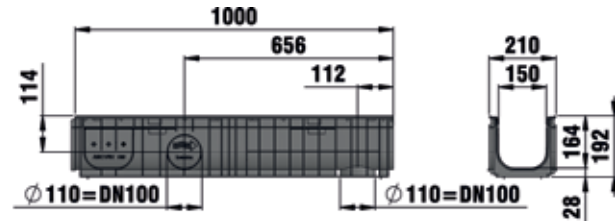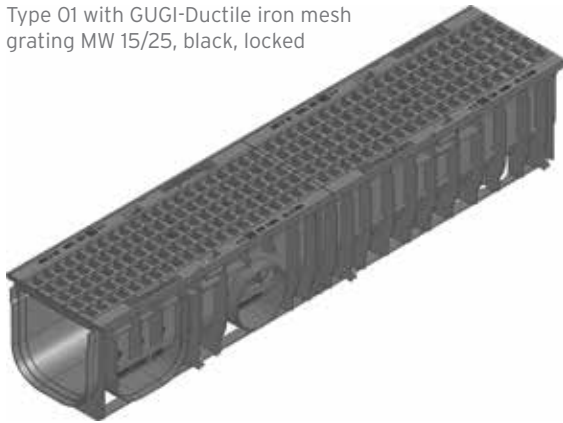

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 01 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	1000	210	192	225	745	13,5	40174
Type 0105 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	500	210	192	225	745	6,0	40149
Type 100 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	1000	210	100	116	745	11,6	40141
Type 01 with ductile iron grating black, SW 6 mm, locked	1000	210	192	225	400	14,0	40176
Type 0105 with ductile iron grating black, SW 6 mm, locked	500	210	192	225	400	8,8	40150
Type 100 with ductile iron grating black, SW 6 mm, locked	1000	210	100	116	400	13,0	40137

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

RECYFIX® STANDARD 150


RECYFIX® STANDARD 150, Accessories



Trash box with galvanised bucket, with mesh grating MW 30/10, galvanised, class B 125, locked



Trash box with galvanised bucket with GUGI-Ductile iron mesh grating MW 15/25, black, class C 250, locked

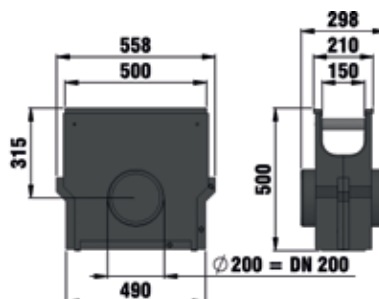

Foul air trap, vertical, DN 100



End cap combined made of PE-PP with outlet DN 70/100, Type 01



End cap closed, type 100

	Length mm	Width mm	Height mm	Weight kg	Item No.
Trash box with slotted grating, cl. A 15, galvanised	500	210	500	17,0	40155
Trash box with galvanised bucket, with mesh grating MW 30/30, galvanised, class B125, locked	500	210	500	19,9	40154
Trash box with galvanised bucket, with mesh grating MW 30/10, galvanised, class B 125, locked	500	210	500	17,8	40156
Trash box with galvanised bucket with GUGI-Ductile iron mesh grating MW 15/25, black, class C 250, locked	500	210	500	19,6	40153
Trash box with galvanised mud bucket, with ductile iron grating black, SW 6 mm, locked	500	210	500	21,0	40157
Foul air trap, vertical, DN 100	-	-	-	0,6	40295
End cap combined made of PE-PP with outlet DN 70/100, Type 01	29	210	203	0,1	40191
End cap closed, type 100	-	210	100	0,1	40190
Sealing material Sikaflex TS Fast, 600 ml, tubular bag, black	-	-	-	0,6	6890
Tubular pistol for Sikaflex TS Fast	-	-	-	1,3	6891
Holesaw, Ø 102 mm, with tool holder for a driller	-	-	-	0,6	980


RECYFIX®STANDARD 150

LINEFIX®	RECYFIX® GREEN	RECYFIX®POINT FASERFIX®POINT	FASERFIX® STANDARD	Slotted Channel	DACHFIX®	RECYFIX® STANDARD	RECYFIX® PLUS	RECYFIX® PRO
----------	-------------------	---------------------------------	-----------------------	-----------------	----------	----------------------	------------------	-----------------

RECYFIX®STANDARD 200

RECYFIX®STANDARD 200, combi article, class A 15



Type 020 with slotted grating,
locked

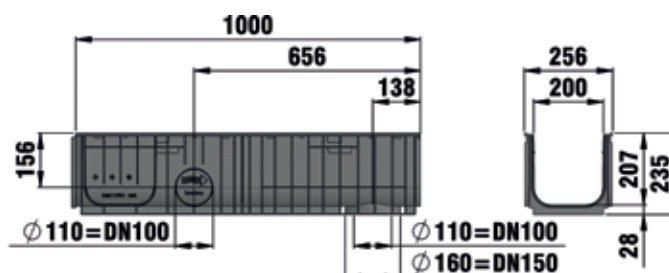

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 010 with slotted grating, locked	1000	256	185	290	390	6,3	40648
Type 020 with slotted grating, locked	1000	256	235	366	390	6,8	40649
Type 100 with slotted grating, locked	1000	256	100	150	390	5,4	40647

RECYFIX®STANDARD 200, combi article, class B 125

Type 010 with mesh grating MW 30/30,
galvanised, locked

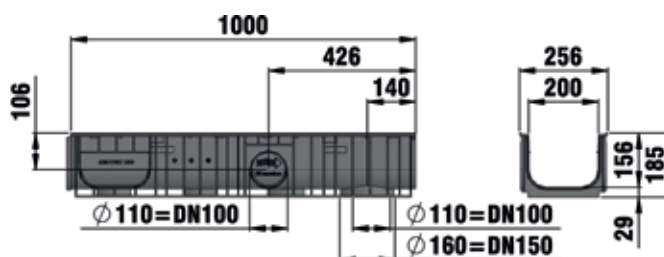
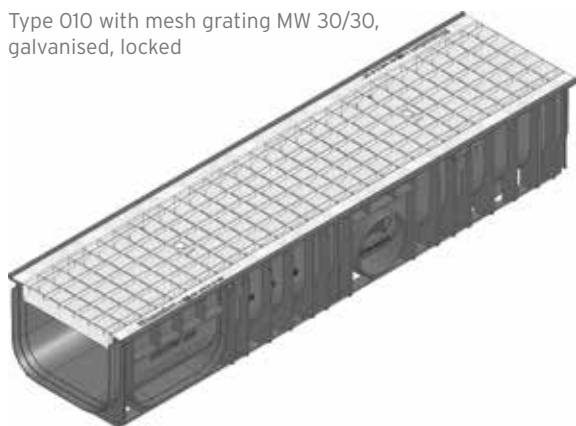


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 010 with mesh grating MW 30/30, galvanised, locked	1000	256	185	290	1620	9,3	40672
Type 020 with mesh grating MW 30/30, galvanised, locked	1000	256	235	366	1620	10,2	40676
Type 100 with mesh grating MW 30/30, galvanised, locked	1000	256	100	150	1620	8,3	40635
Type 010 with mesh grating MW 30/10, galvanised, locked	1000	256	185	290	1442	11,2	40685
Type 020 with mesh grating MW 30/10, galvanised, locked	1000	256	235	366	1442	11,3	40686
Type 100 with mesh grating MW 30/10, galvanised, locked	1000	256	100	150	1442	10,1	40636

RECYFIX®STANDARD 200

RECYFIX®STANDARD 200, combi article, class C 250

Type 010 with GUGI-Ductile iron mesh grating MW 15/25, black, locked

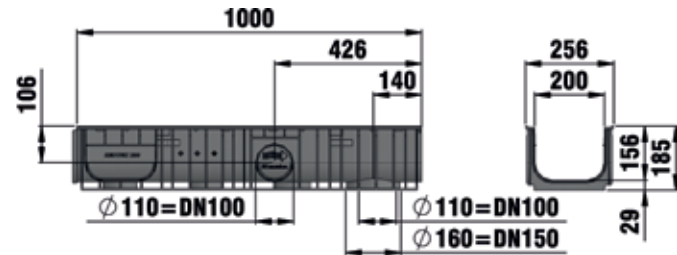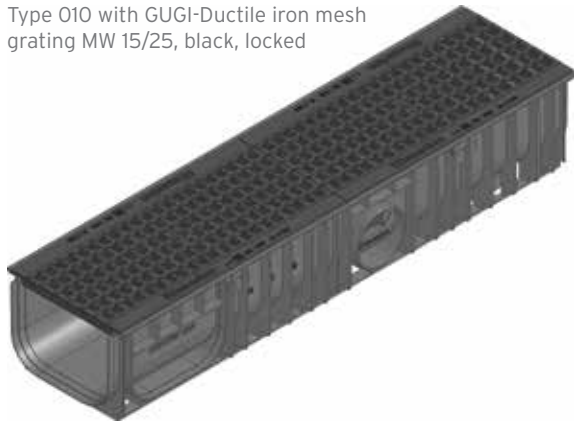

	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 010 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	1000	256	185	290	825	15,4	40665
Type 020 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	1000	256	235	366	825	15,8	40666
Type 100 with GUGI-Ductile iron mesh grating MW 15/25, black, locked	1000	256	100	150	825	14,1	40641
Type 010 with ductile iron grating 2 x 85/20, black, locked	1000	256	185	290	822	15,0	40660
Type 020 with ductile iron grating 2 x 85/20, black, locked	1000	256	235	366	822	15,4	40661
Type 100 with ductile iron grating, SW 20.5, black, locked	1000	256	100	150	822	13,9	40640
Type 010 with ductile iron grating, SW 6 mm, locked	1000	256	185	290	656	17,6	40688
Type 020 with ductile iron grating, SW 6 mm, locked	1000	256	235	366	656	18,1	40689
Type 100 with ductile iron grating, SW 6 mm, locked	1000	256	100	150	656	16,7	40687

RECYFIX®
PRO

RECYFIX®
PLUS

RECYFIX®
STANDARD

DACHFIX®

Slotted Channel

FASERFIX®
STANDARD

RECYFIX®POINT
FASERFIX®POINT

RECYFIX®
GREEN

LINEFIX®

RECYFIX® STANDARD 200


RECYFIX® STANDARD 200, Accessories



Trash box with GUGI-Ductile iron mesh grating MW 15/25, black, cl. C 250, locked



Trash box with mesh grating MW 30/30, galvanised, cl. B 125, locked



End cap combined made of PE-PP with outlet DN 100, Type 010

	Length mm	Width mm	Height mm	Weight kg	Item No. galvanised	Item No. stainless steel
Trash box with galvanised mud bucket and Slotted grating, galvanised, class A 15, locked	500	256	734	28,0	40658	-
Trash box with mesh grating MW 30/30, galvanised, cl. B 125, locked	500	256	734	27,0	40656	-
Trash box with mesh grating MW 30/10, galvanised, cl. B 125, locked	500	256	734	28,6	40657	-
Trash box with GUGI-Ductile iron mesh grating MW 15/25, black, cl. C 250, locked	500	256	734	30,8	40653	-
Trash box with ductile iron grating 2 x 85/20, black, class C 250, locked	500	256	734	30,6	40654	-
Trash box with galvanised mud bucket and ductile iron grating, SW 6 mm, locked	500	256	734	32,3	40693	-
End cap combined made of PE-PP with outlet DN 70, Type 010	-	256	185	0,2	40692	-
End cap closed, Type 01	-	260	275	1,1	12081	12581
End cap closed, type 100	-	-	80	0,1	40690	-
End cap combined made of PE-PP with outlet DN 100, Type 010	-	256	200	0,2	40792	-
Sealing material Sikaflex TS Fast, 600 ml, tubular bag, black	-	-	-	0,6	6890	-
Tubular pistol for Sikaflex TS Fast	-	-	-	1,3	6891	-
Holesaw, Ø 102 mm, with tool holder for a drill	-	-	-	0,6	980	-



RECYFIX®STANDARD 200

RECYFIX® PRO	RECYFIX® PLUS	RECYFIX® STANDARD	DACHFIX®	Slotted Channel	FASERFIX® STANDARD	RECYFIX®POINT FASERFIX®POINT	RECYFIX® GREEN	LINEFIX®
-----------------	------------------	----------------------	----------	-----------------	-----------------------	---------------------------------	-------------------	----------

RECYFIX®STANDARD 300

RECYFIX®STANDARD 300, combi article, class C 250

Type 010 with GUGI-Ductile iron mesh grating, MW 15/25, black, locked

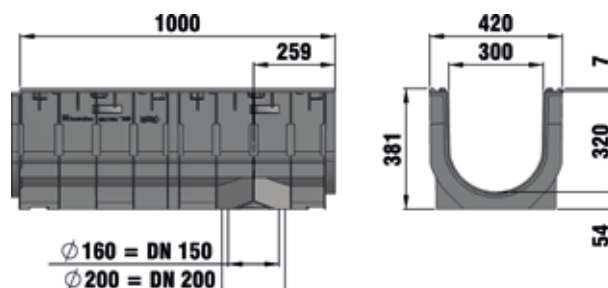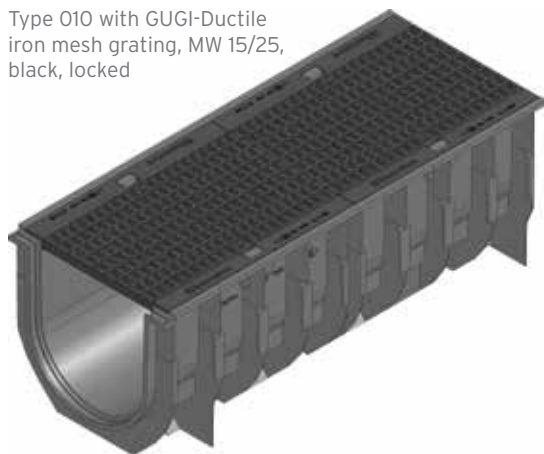


	Length mm	Width mm	Height mm	Drainage cross-sect. cm ²	Intake cross-sect. cm ² /m	Weight kg	Item No.
Type 01 with GUGI-Ductile iron mesh grating, MW 15/25, black, locked	1000	350	292	725	1385	29,1	40870
Type 010 with GUGI-Ductile iron mesh grating, MW 15/25, black, locked	1000	420	381	857	1385	33,2	40875

RECYFIX®STANDARD 300, Accessories



End cap closed, galvanised, type 01



End cap with vertical UPVC outlet, galvanised, type 01

	Length mm	Width mm	Height mm	Weight kg	Item No.
End cap closed, galvanised, type 01	-	360	340	1,8	40882
End cap closed, galvanised, Type 010	-	420	380	2,8	40881
End cap with vertical UPVC outlet, galvanised, type 01	-	360	340	2,3	40892
End cap with horizontal UPVC-outlet DN 200, galvanised, Type 010	-	420	380	3,1	40891
Sealing material Sikaflex TS Fast, 600 ml, tubular bag, black	-	-	-	0,6	6890
Tubular pistol for Sikaflex TS Fast	-	-	-	1,3	6891